



8 7 6 5 4 3 2 1

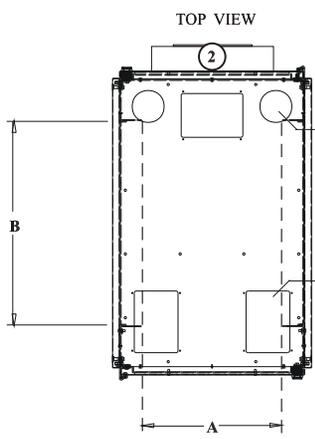

TOP VIEW

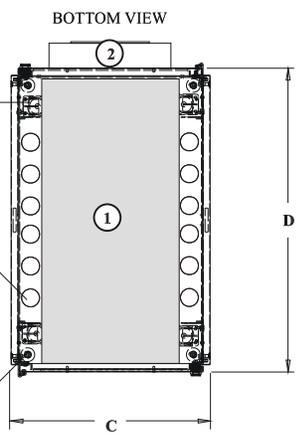

BOTTOM VIEW

OPTIONAL CASTERS (4)
1100LBS (499kg) MAX

4.0 (102) DIA.
CABLE ACCESS
(2 PLACES)

SEALING PLATE
(3 PLACES)

2.25 (57) DIA.
CABLE ACCESS
6 PER SIDE - 38"
4 PER SIDE - 30"

LEVELING FEET (4)
2000LBS (907kg) MAX

A

RACK MOUNTING WIDTH	
EIA NOMINAL	INSIDE DIM
19"	17.8 (450)
23"	22.8 (580)

B

ADJUSTABLE MOUNTING DEPTH		
BASE	MIN	MAX
30"	18.5 (470)	22.5 (571)
38"	26.5 (673)	30.5 (775)

INVERT EACH RAIL IN THE UNIT
TO INCREASE THE MAX BY 4" (102)

C

FOOTPRINT - WIDTH		
RACK	NO PANELS	with PANELS
19"	23.5 (597)	25 (635)
23"	27.5 (699)	29 (737)

FOR MULTIPLE UNIT SYSTEMS ADD 0.2 (5.0)
CLEARANCE WIDTH BETWEEN FRAMES

D


FOOTPRINT - DEPTH		
NOMINAL	with DOORS	with BCM
30"	30.2 (767)	33.2 (844)
38"	38.2 (970)	41.2 (1047)

E


USABLE SPACE
with No UPS = 35U
with GXT2U = 33U
with PS700RM-1400RM = 32U
with GXT RT or PS2200RM = 31U

UPS REQUIREMENTS - DEDICATED CIRCUIT
NEMA 5-15R: GXT2U 700-1500, GXT700-1500,
PS700RM-1400RM
NEMA 5-20R: GXT2U-2000, GXT2000
NEMA L5-30R: GXT2U-3000, GXT3000, PS2200RM

3.0 x 5.0 (76 x 127)
CABLE ACCESS
(6 PER SIDE)

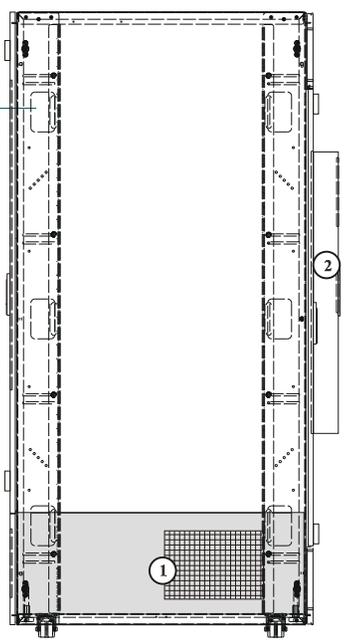


SIDE VIEW
(SHOWN without PANELS)

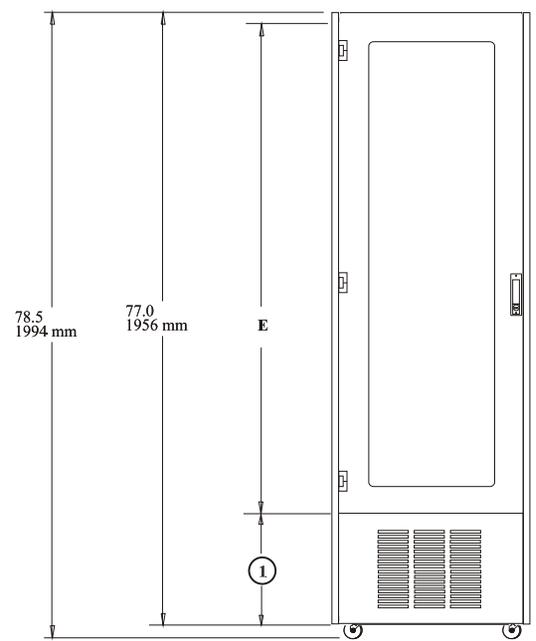

FRONT VIEW

SEALED CABLE ENTRANCE
RACEWAY 15.8 (383) x 0.8 (20)

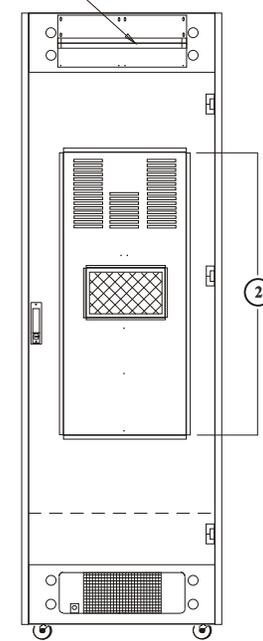

REAR VIEW

- ① **RACK-MOUNT ENVIRONMENTAL CONTROL MODULE (ECM).**
ELECTRICAL REQUIREMENTS:
DEDICATED 120V 15A CIRCUIT (NEMA 5-15R)
CLEARANCE REQUIREMENTS:
OPERATIONAL: 12" (305) FRONT, REAR & TOP OF THE ENCLOSURE
SERVICE: 36" (915) FRONT.
REFER TO DRAWING DPG02-01 or SL-15600 for PERFORMANCE SPECIFICATIONS
- ② **OPTIONAL BACKUP COOLING MODULE (BCM)**
ELECTRICAL REQUIREMENTS:
NEMA 5-15R, FACTORY CONNECTED TO OPTIONAL UPS
- ③ **OPTIONAL SEALED ENTRANCE CABLE BUNDLE.**
REQUIRED FOR CABLE ENTRY VIA ROUND HOLES (1.6" OR 2.3" INSIDE DIA.)
- ④ **TOP-MOUNT ECM AIRFLOW ACCESS ONLY.**
SEALED ON ALL RACK-MOUNT ECM APPLICATIONS.

FRAME CAPACITY
2000LBS (907kg) MAX

ALL DIMENSIONS ARE IN INCHES and (mm)
DO NOT SCALE DRAWINGS

QUANTITY REQUIRED	REV	IDENTIFYING DRAWING NO.	DATE	NOMENCLATURE OR DESCRIPTION
4	1	DPG01-02	SEP	FOUNDATION MINI COMPUTER ROOM with RACK MOUNT ECM


DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED	
1 PLACE DECIMALS	± .1
2 PLACE DECIMALS	± .03
3 PLACE DECIMALS	± .015
ANGULAR	± 2°

REV	BY	CHKD	DATE	SCALE	DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWINGS	PARTS LIST	SHEET	REV
0000	SE	SS455	N				1	1



FOUNDATION MINI COMPUTER ROOM with RACK MOUNT ECM

DPG01-02



8 7 6 5 4 3 2 1